

MICROMULCH


Micro embossed mulch Film

Product Specifications & Packing Mode

Film Thickness	20 - 100 microns
Film Width	Up to 1650mm or 1.65m
Film Length	Per client requirements
Film color	Black, silver, brown, white, clear, red, VIF(aluminium laminated with PE film)
Roll Width	Per client requirements
Packing Mode	Single rolls protected by PE wrapping on the pallet Inner core diameter: 7.6 cm or 3 in

Mechanical & Optical Properties

Parameter	Unit	results	tolerance	test method
Basis weight	g/m ²	>25	+/- %10	ASTM D756
Tensile Strength at peak MD	N/25mm	>9	+/- %10	ASTM D882
Tensile Strength at peak CD	N/25mm	>5	+/- %10	ASTM D882
Elongation at peak MD	%	>200	+/- %10	ASTM D882
Elongation at peak CD	%	>400	+/- %10	ASTM D882
Light Transmission-black	%	0		ASTDM D1003
Light Absorption-black	%	95		ASTDM D1003
Light reflection	%	5		ASTDM D1003

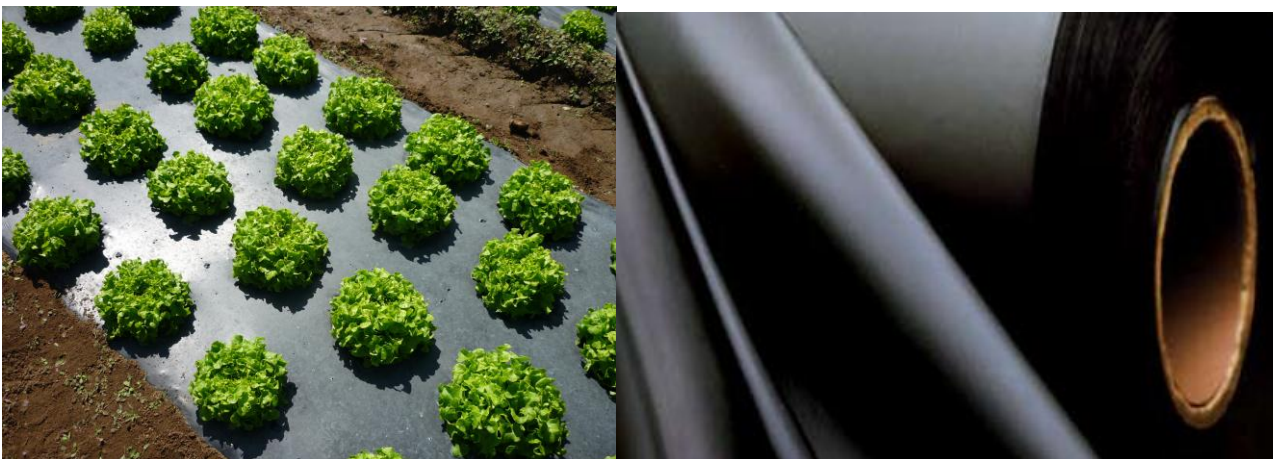

MICROMULCH

Request customized specifications for Mulch Film!

,Eskisehir Organize san. Bol. 26. Cad. No 9 Eskisehir , Turkey **Tel: +90222 236 23 63 Fax: +90 0222 236 23 53** E-mail: mulchfilm@mulchfilm.net, malcfilm@malcfilm.com, felixplastic@felixplastic.com Web: www.muclchfilm.net, www.maclfilm.com